

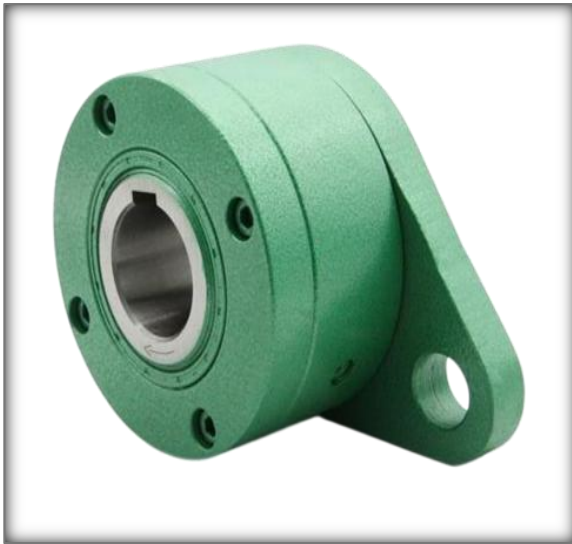
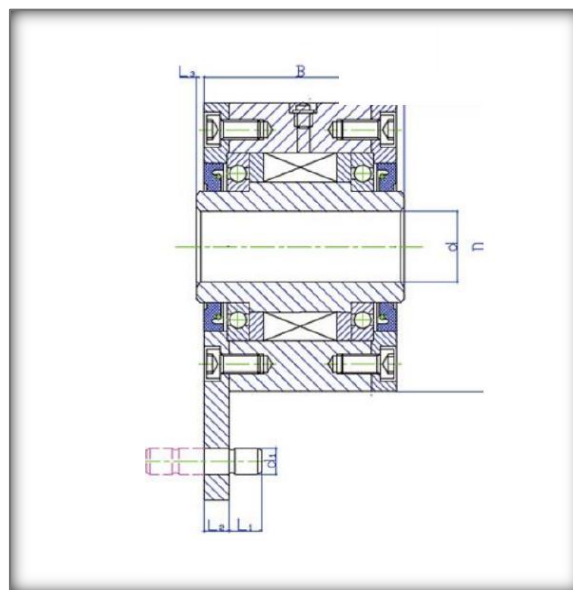


TORQUE ARM

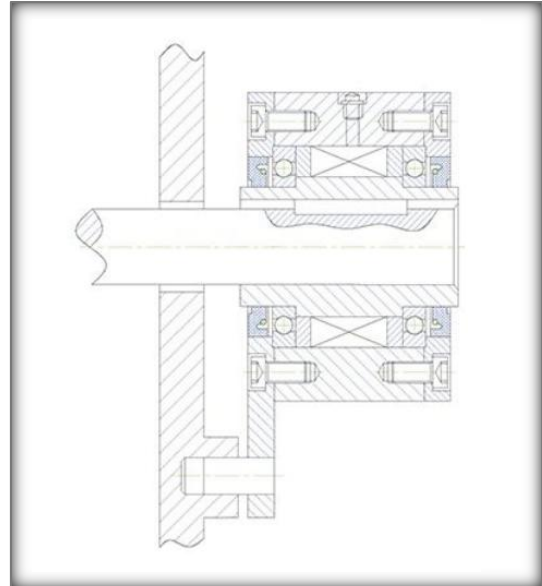

- The NF Series is a non-contact backstop, which is widely used in the design of mining, coal mining, bulk material assembly conveying devices, and lifting devices with backstop requirements. Its internal structure adopts a new type of wedge with optimized design.
- In addition to impact resistance and huge backstop torque, it also cleverly uses the centrifugal force of its own rotation: when the input shaft rotates at a speed higher than the minimum speed, the internal work of the backstop can be realized with no contact, zero wear, long service life.

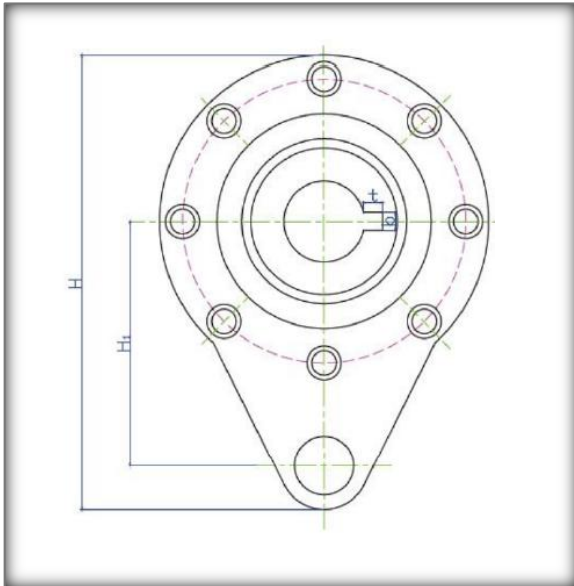

Model	Torque W (Nm)	Min. Rotation speed (r/min)	Max. Rotation speed (r/min)	d	D 2	d1	H	H1	B	L1	L2	L3	Weight (kg)
NF10	1,000	450	1,500	40-50	190	28	273	150	135	25	20	5	28
NF16	1,600	450	1,500	45-60	208	32	295	160	140	25	22	5	31
NF25	2,500	425	1,500	50-70	230	38	323	170	145	25	25	5	38
NF40	4,000	425	1,500	60-80	245	42	350	185	156	28	30	5	49
NF63	6,300	400	1,500	70-90	260	45	370	195	170	30	35	5	62
NF80	8,000	400	1,500	80-100	275	48	396	210	175	35	35	5	73
NF100	10,000	400	1,500	90-110	295	52	425	225	210	35	45	5	98
NF125	12,500	375	1,500	100-130	330	58	473	250	234	40	50	5	154
NF160	16,000	375	1,000	110-140	360	62	512	270	244	40	55	8	175
NF200	20,000	350	1,000	120-150	400	65	565	300	244	50	58	8	241
NF250	25,000	350	1,000	130-160	430	70	620	335	254	50	63	8	256